


This document is our property and shall not
without our permission be altered, copied,
used for manufacturing or communicated to
any other person or company.

ACCEPTED FOR TOOLING PROD
 ACCEPTED FOR PROD

ITEM No 939101
 DESCRIPT _____
 CUSTOMER _____
 DATE _____
 SIGN _____

NOTICE: UNLESS OTHERWISE STATED THE FOLLOWING APPLIES

SHARP EDGES REMOVED		FITTING ADVICE ACCORDING TO					ISO 2768-1/m	ROUGH CASTINGS ± 1.0 MM	M-THREAD 6H/6g - ISO 965 U-THREAD 2A/2B - ANSI B1.1
LENGTH	DEVIATION	± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	TOLERANCES FOR OUTSIDE DIAMETER h11	
	NOM MEAS. MENT	LOW (0)	3	6	30	120	400	TOLERANCES FOR INSIDE DIAMETER H11	
		UPPR	3	6	30	120	400	1000	

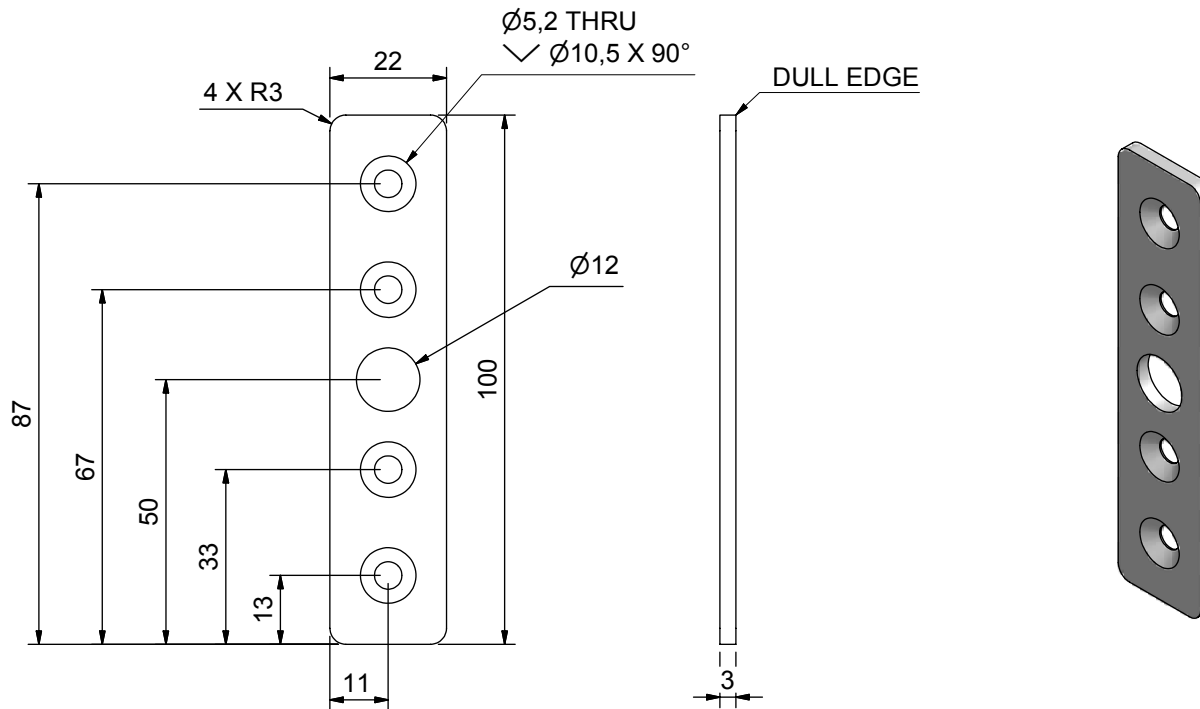

SHARP EDGES REMOVED



SWEDEN
 Phone +46(0)8 448 73 20
 Fax +46(0)8 745 32 25

MATERIAL		SCALE	DATE
SURFACE TREATMENT		COLOUR	
DESIGN		CHECKED	APPROVED
DRAWN		REPLACES	CAD
		Inventor	
PR-INO.		SHEET	
A07-089-2		1 / 1	
REV	1	3	5
	2	4	6
			7
			8
STATUS		DRAW / ITEM NO.	
B		939101	

A - ONLY FOR PRICE INQUIRY
 B - ONLY FOR PRODUCTION OF TOOLING AND SAMPLES
 P - APPROVED FOR PRODUCTION