

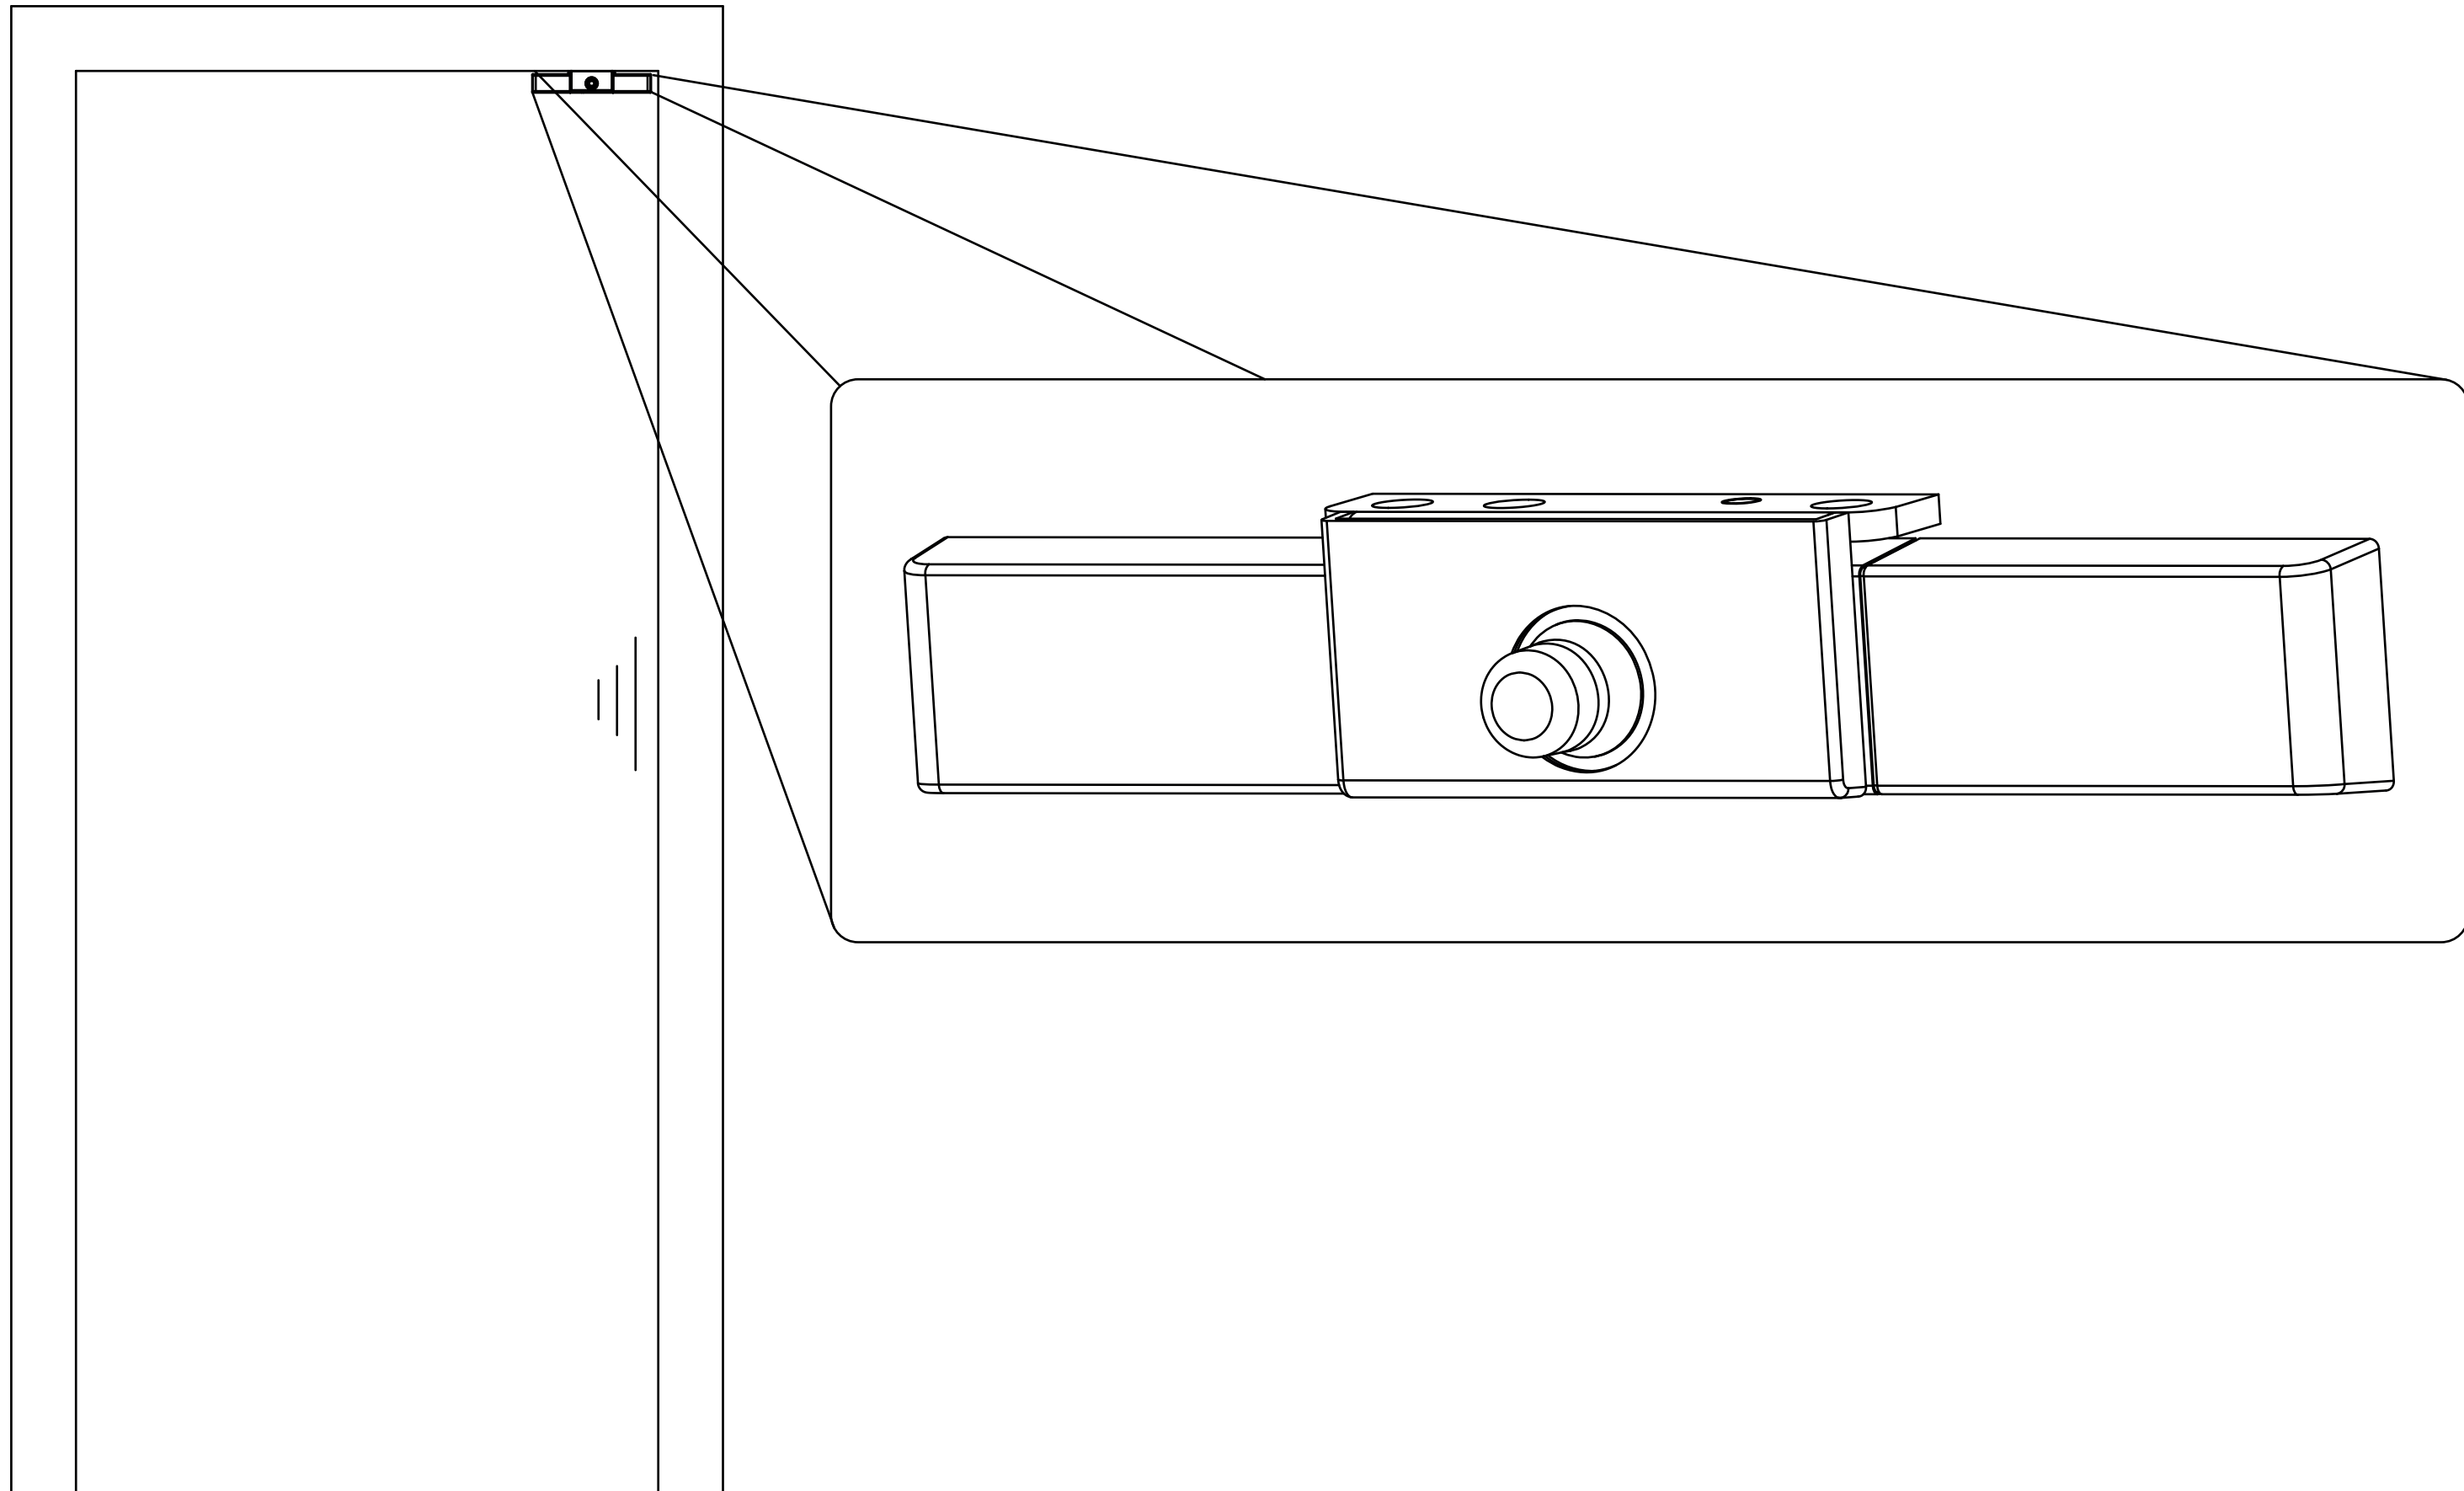
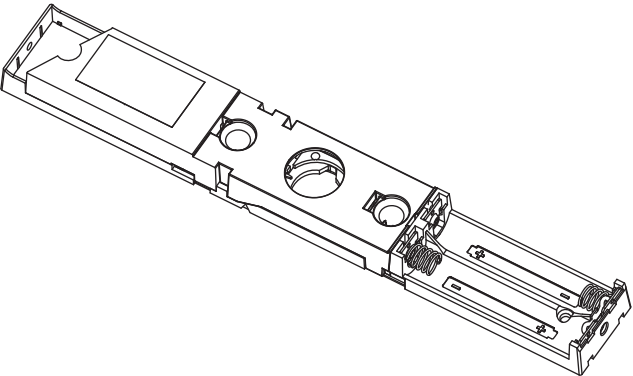
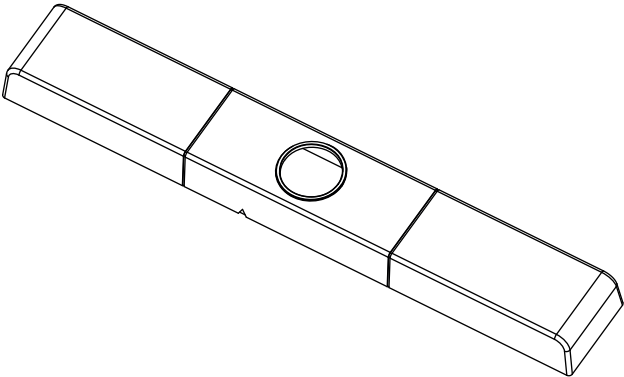






Lock on a inner-door




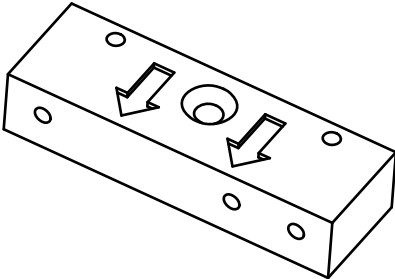

(Angle frame opening outwards)



Parts


1X	Lock	
1X	Cover lock	
1X	Angle bracket	
1X	Nut cover	
1X	Cover bracket	
2X	AAA battery	
5X	M5 screw	
1X	M2 screw	

Tools

Drillingmachine	
Screwdriver	
Ø3 mm drill	
Assisting tool	
M5 screw (Mounting assisting tool)	


1

Close the door




2

Place the assisting tool at the corner of the door (opposite side of opening direction)

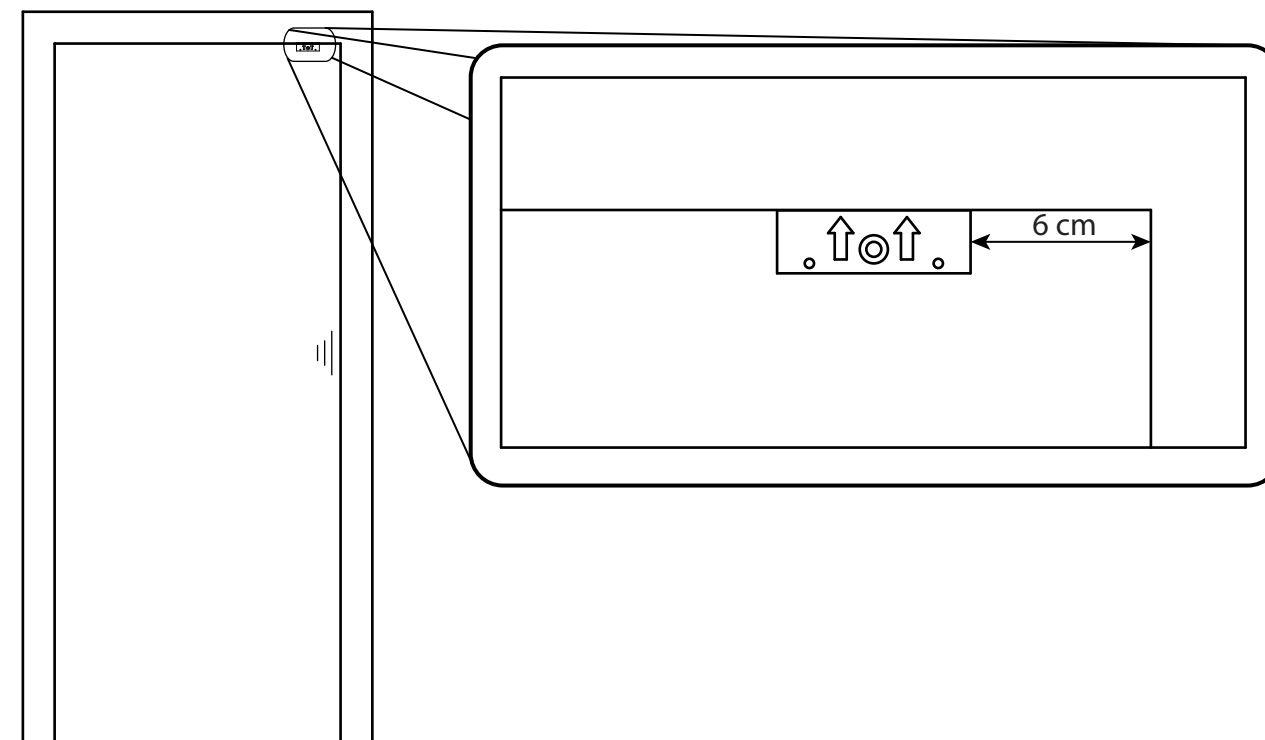

3

Mount the assisting tool with a M5 screw

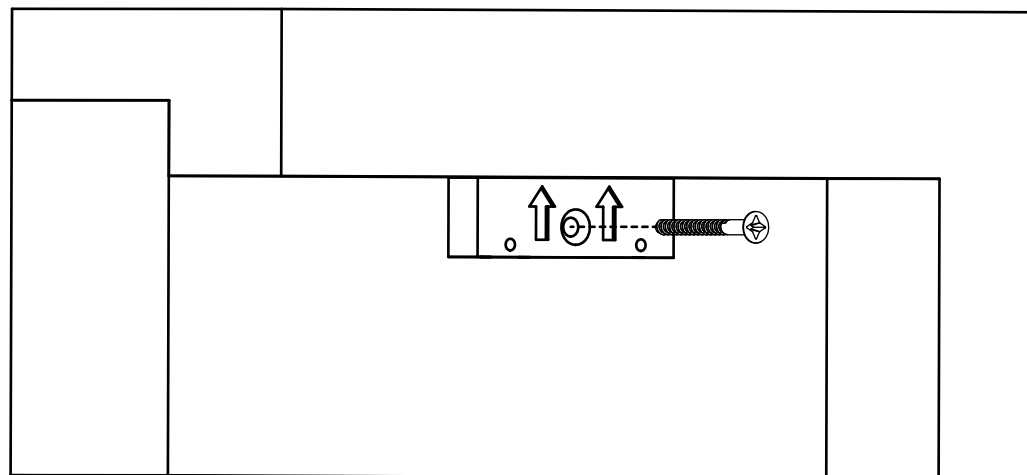


Attention! Make sure the assisting tool is pressed in the arrow direction

Use:




M5



4

Drill two holes in the door frame

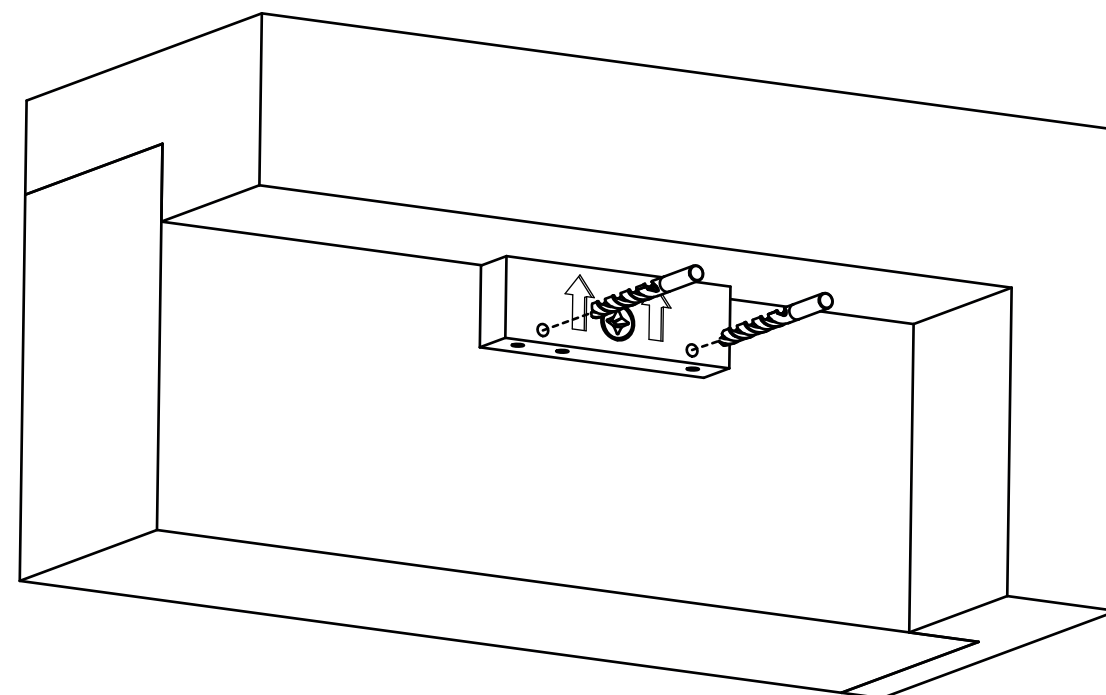


Use:

Ø3



5

Drill three holes in the door frame

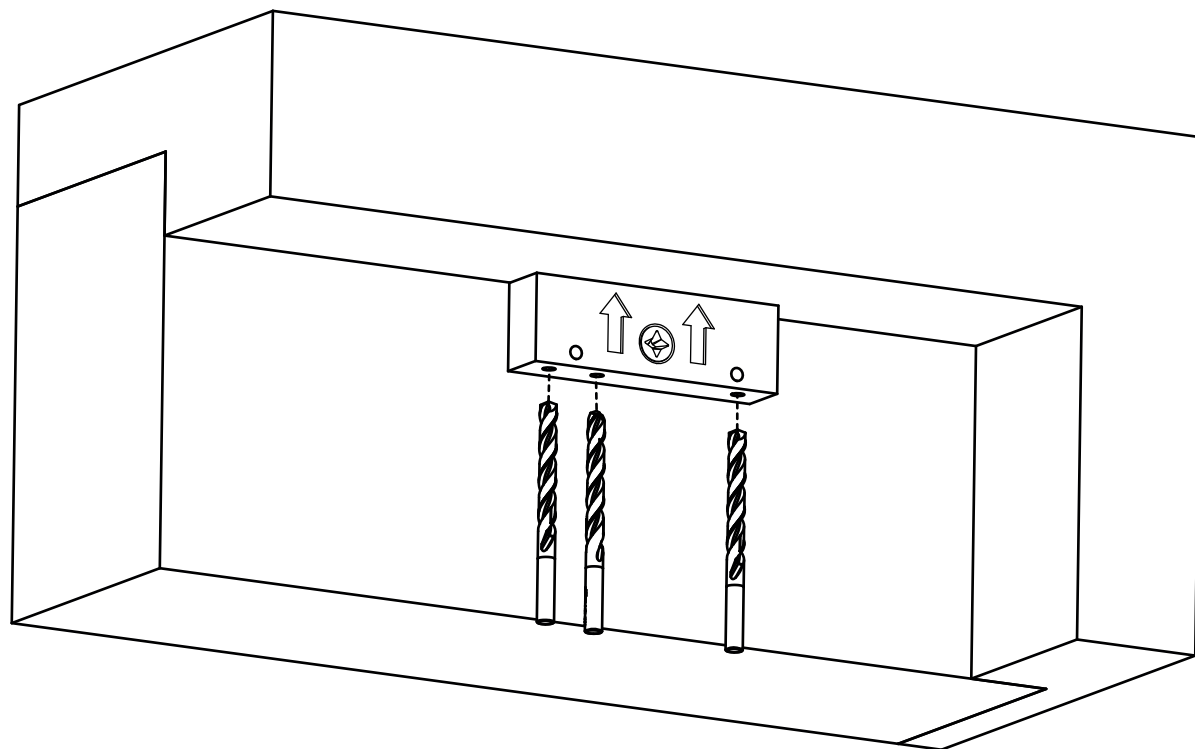


Use:



6

Remove the assisting tool. You should now have drilled five holes


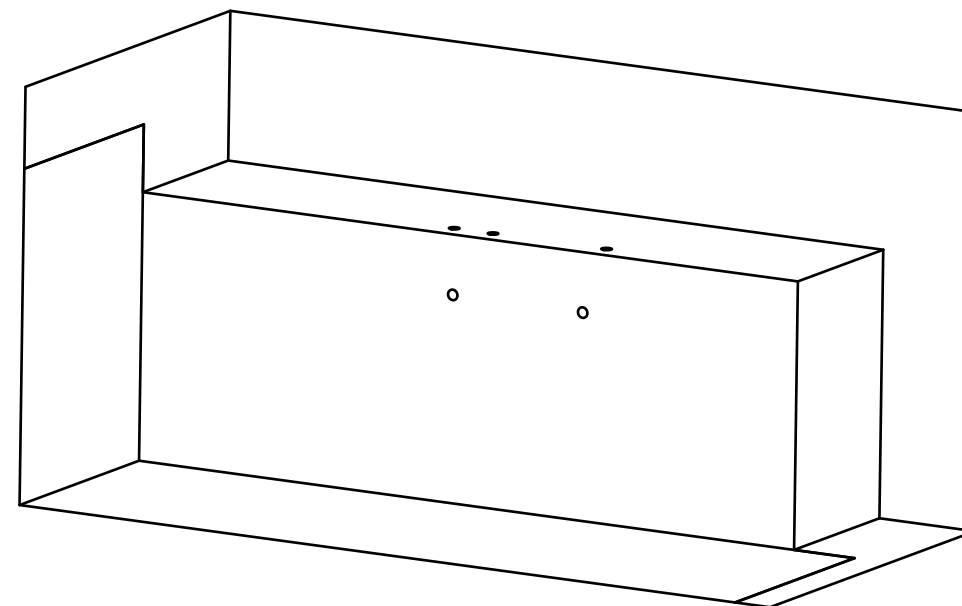


Use:



7

Screw the lock onto the door

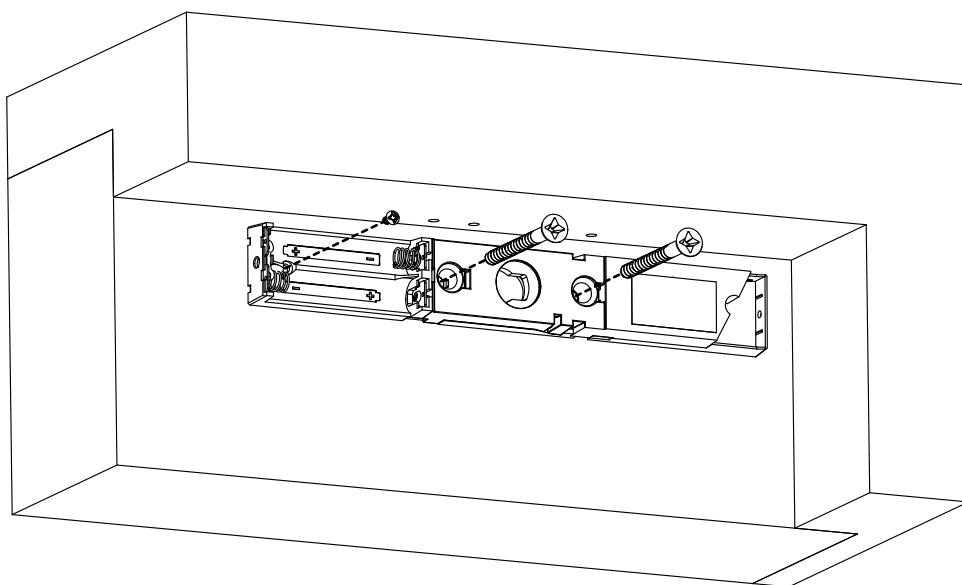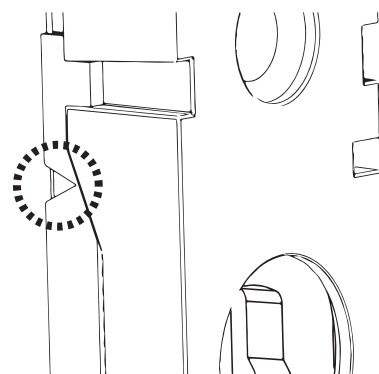**ATTENTION!**


Make sure the small triangle on the lock is facing against the door frame

Use:



8

Open the door and mount the angle bracket on the door frame

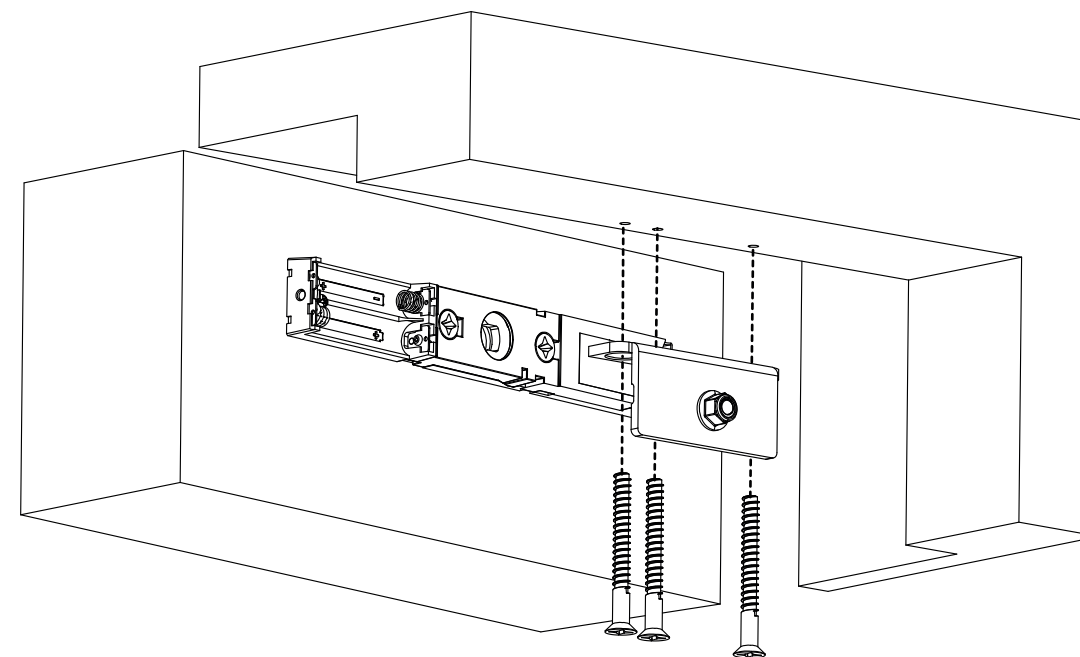


Use:




9

Mount the angle bracket cover and nut cover

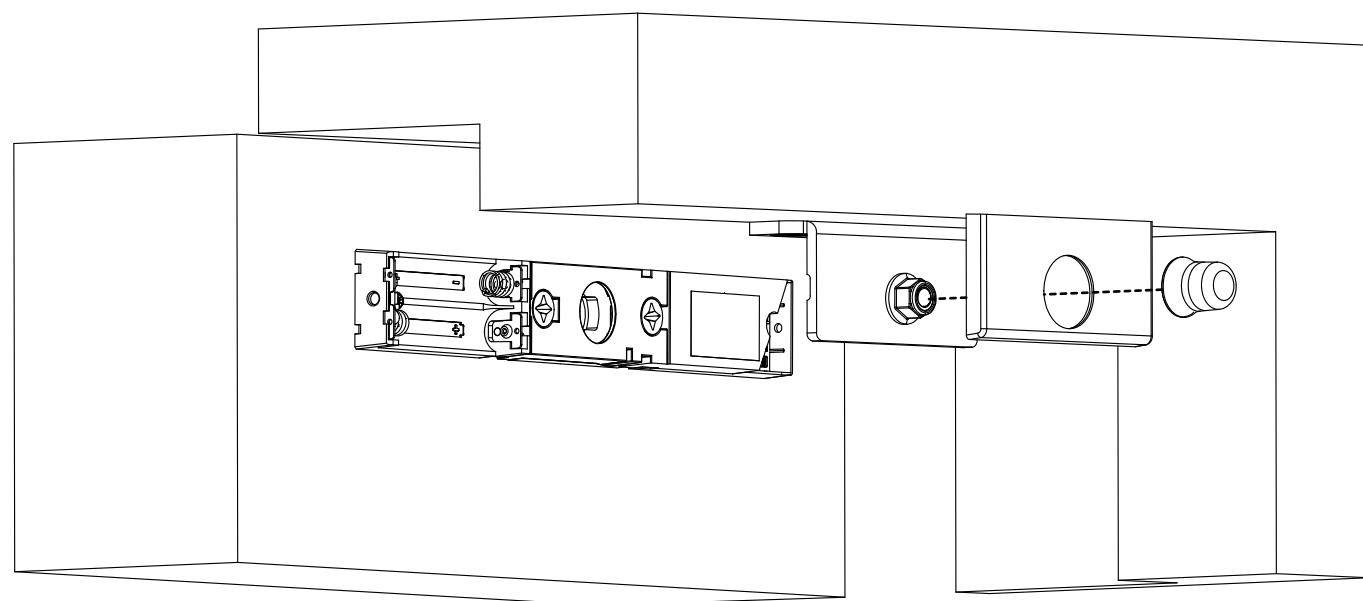



10

Place the batteries

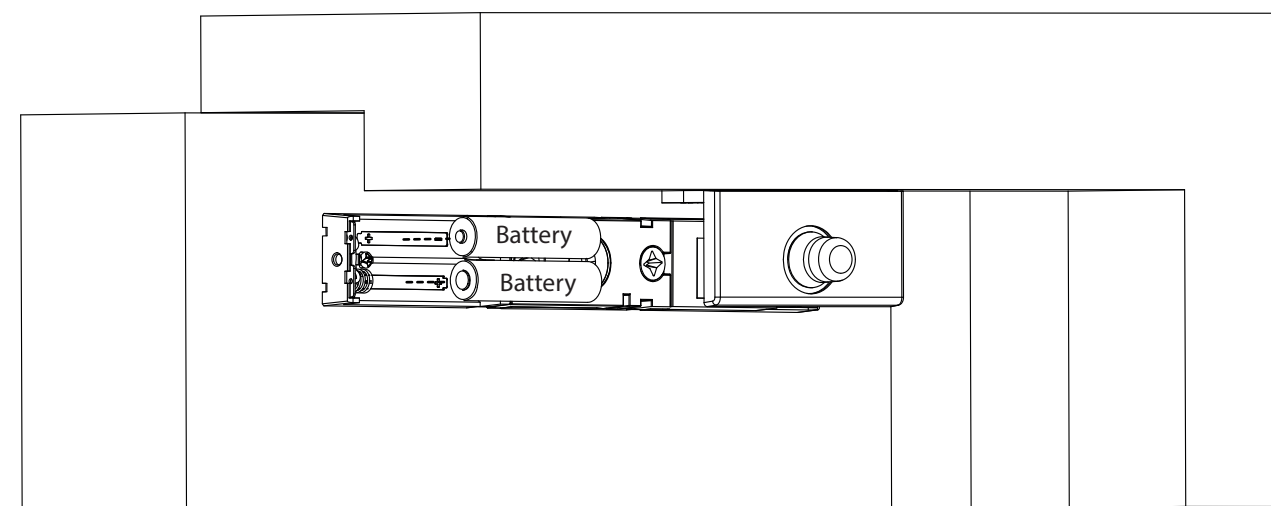


11

Pair the lock with your smartphone

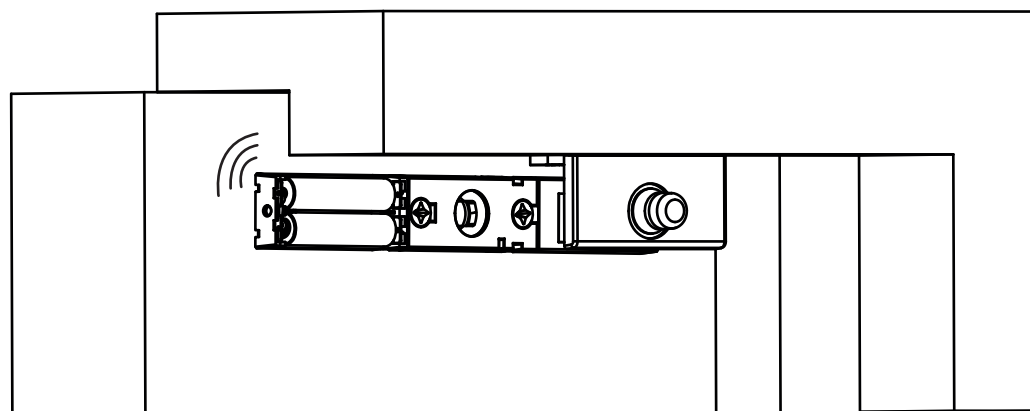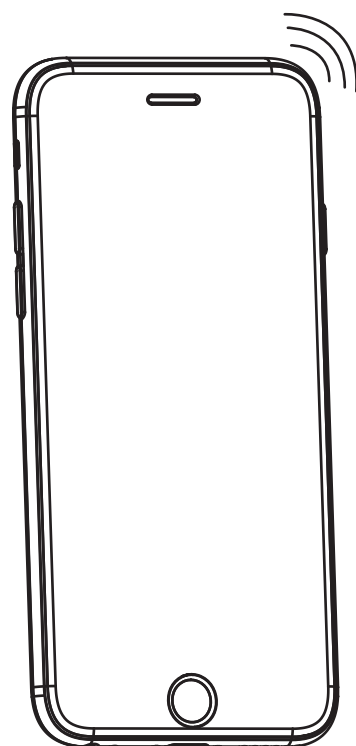


12

Mount cover and close the door






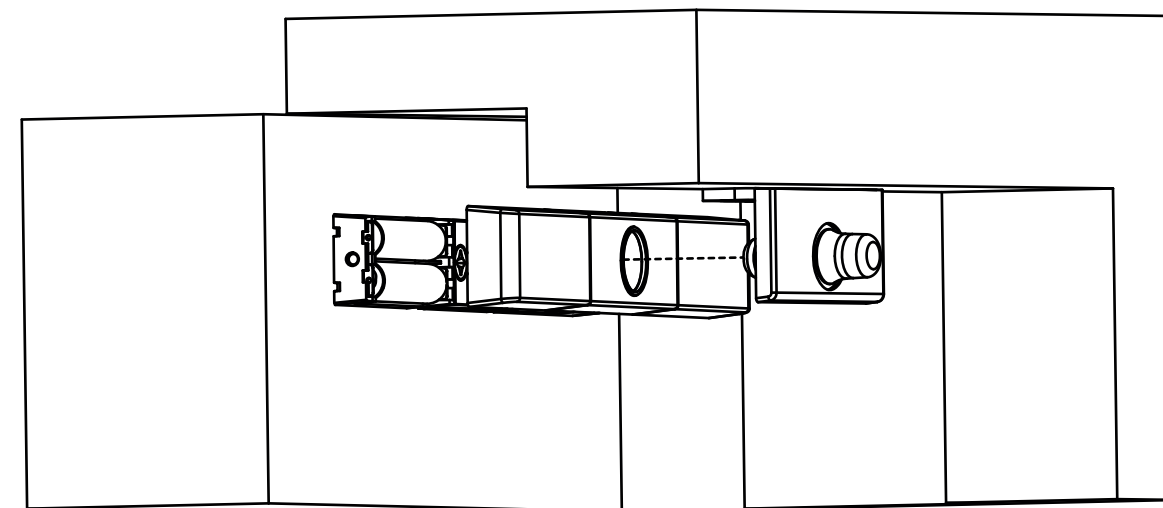




Lock on a window or patio-door

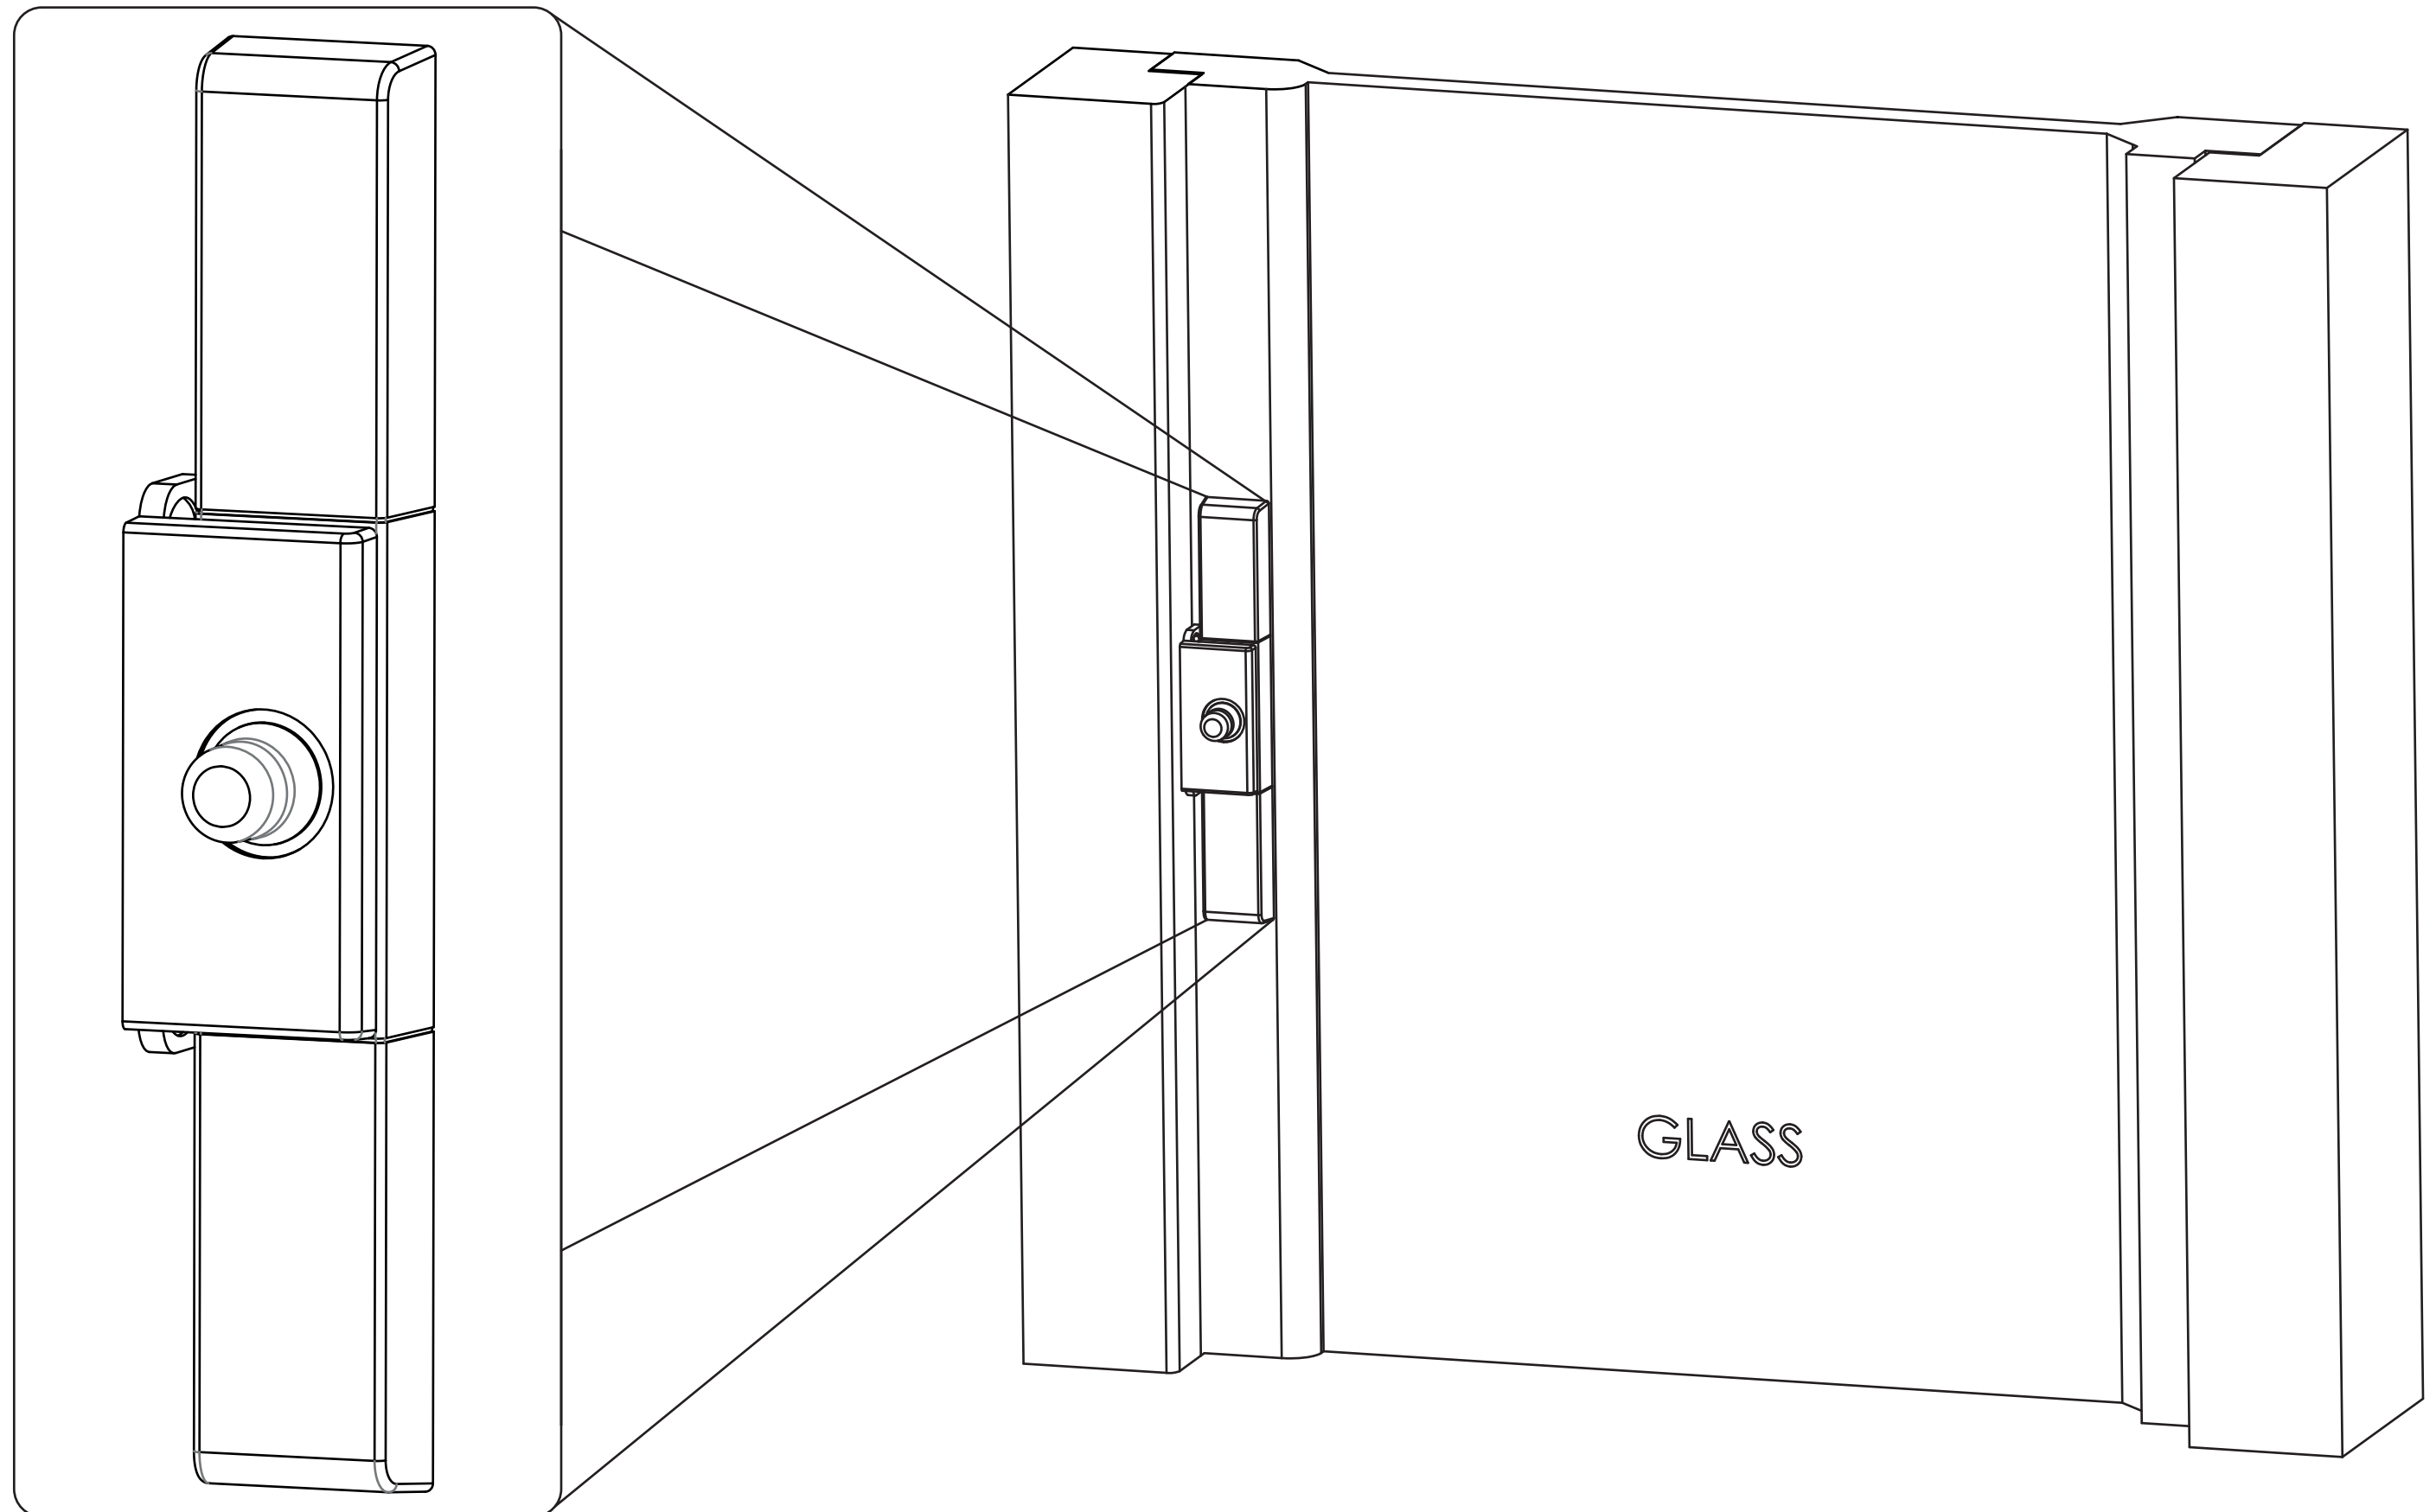


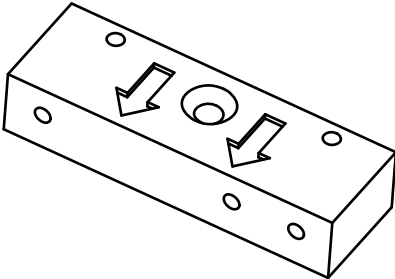

(Angle frame opening outwards)

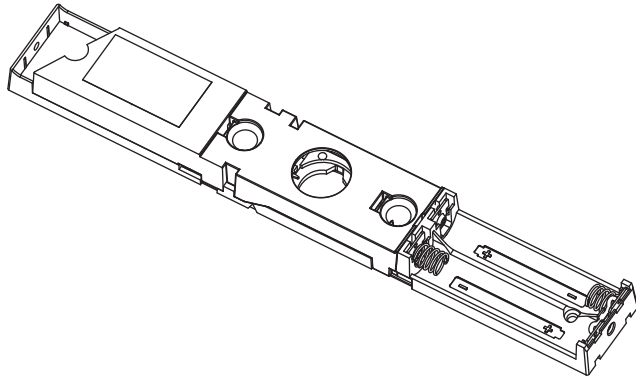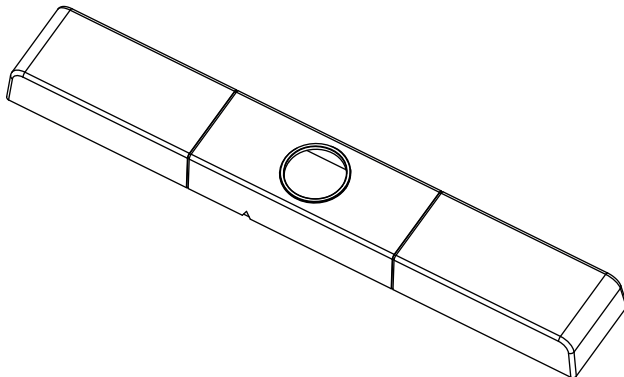

Parts


1X	Lock	
1X	Cover lock	
1X	Angle bracket	
1X	Nut cover	
1X	Cover bracket	
2X	AAA battery	
5X	M5 screw	
1X	M2 screw	

Tools

Drillingmachine	
Screwdriver	
Ø3 mm drill	
Assisting tool	
M5 screw (Mounting assisting tool)	


1

Close the window/patio-door

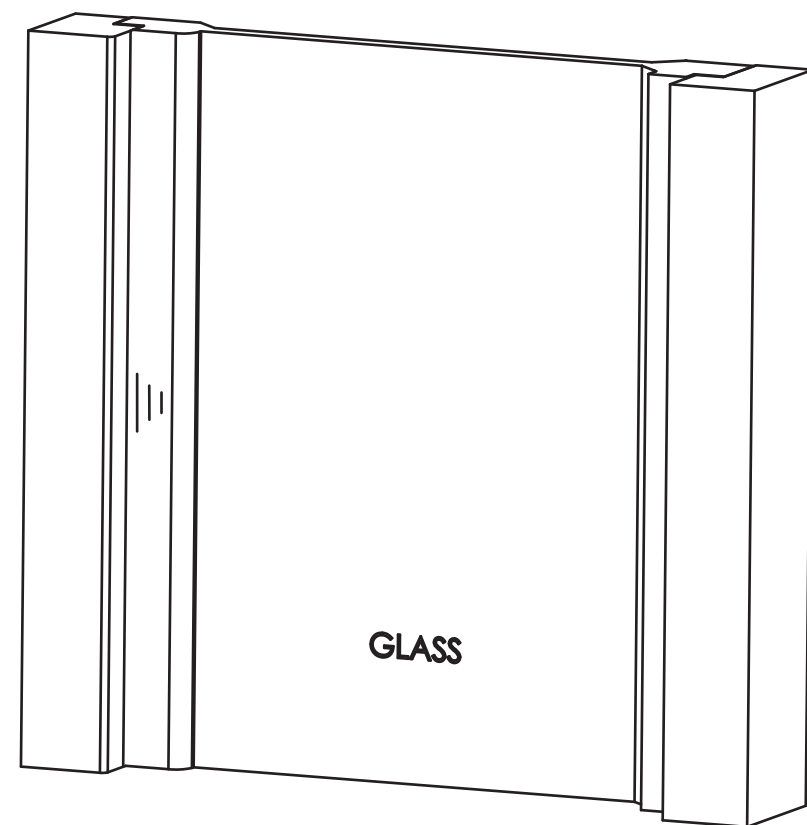


2

Place the assisting tool in the corner of the frame

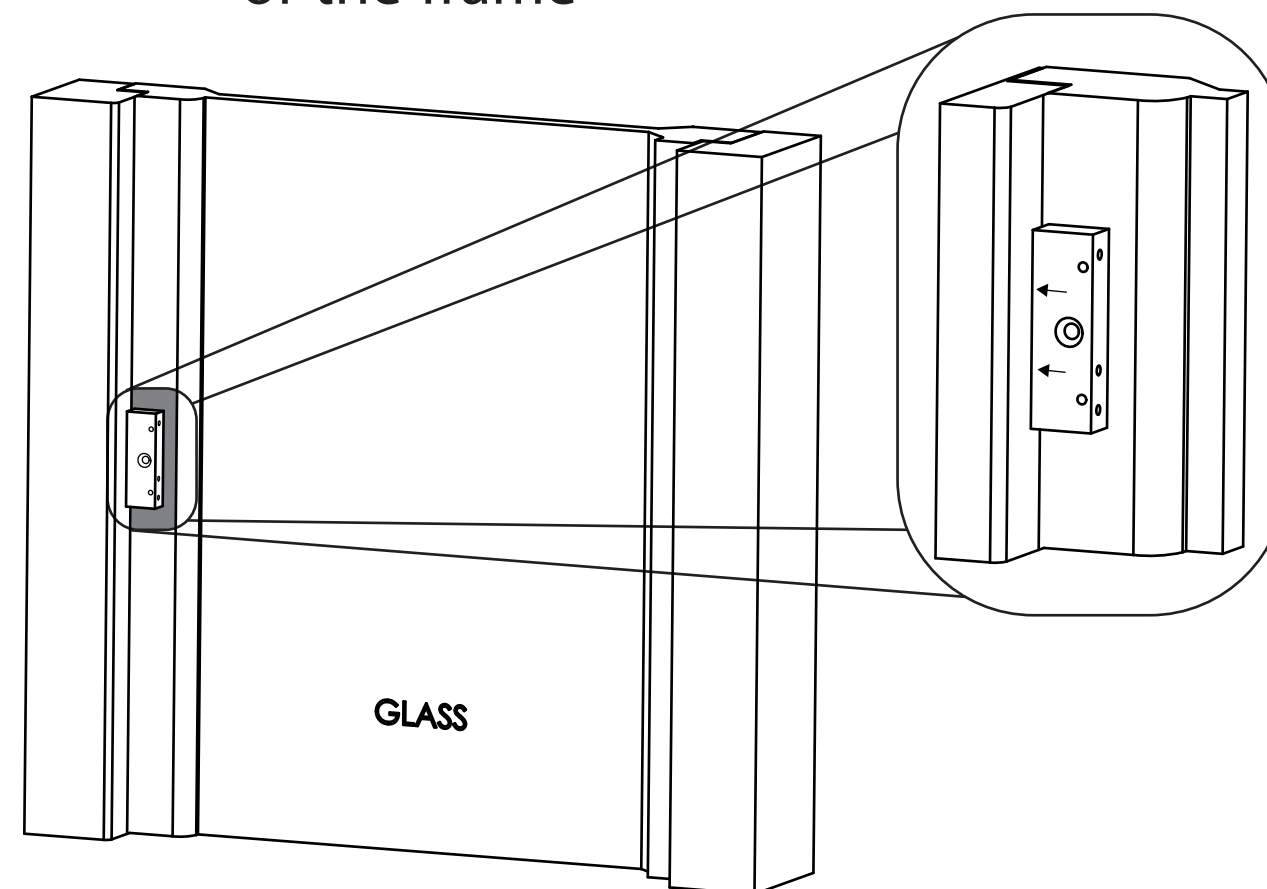

3

Mount the assisting tool with a M5 screw

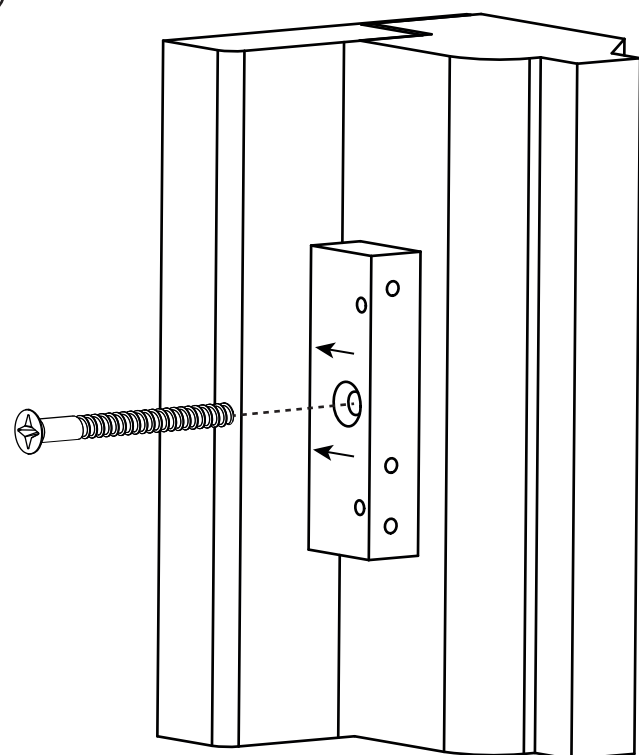**Attention!**

Make sure the assisting tool is
pressed into the corner of the
window frame.

Use:




M5



4

Drill two holes in the window frame

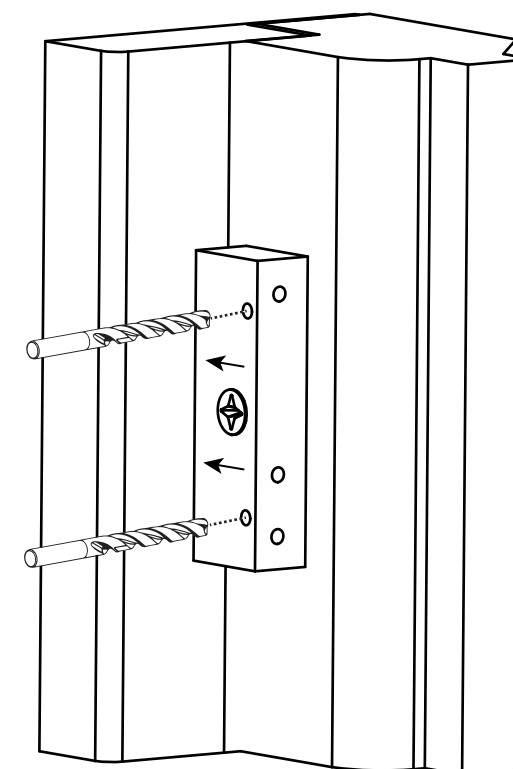


Use:

Ø3



5

Drill three holes in the frame

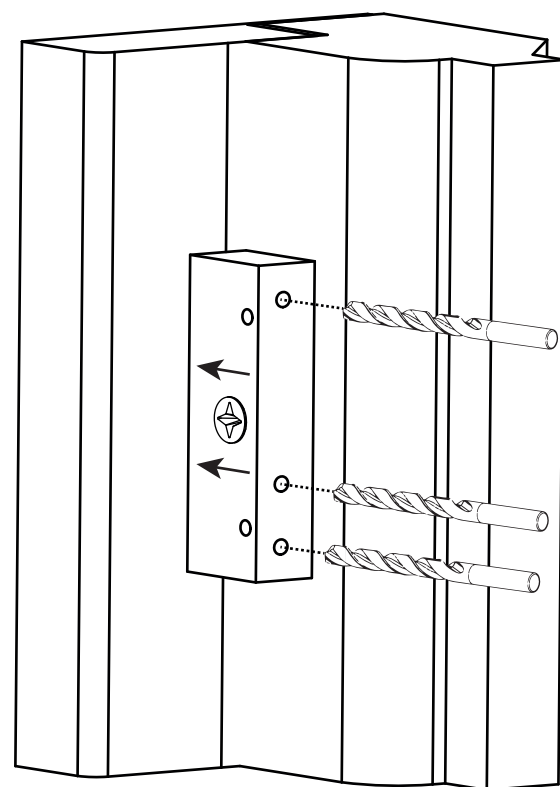


Use:

Ø3



6

Remove the assisting tool. You should now have drilled five holes


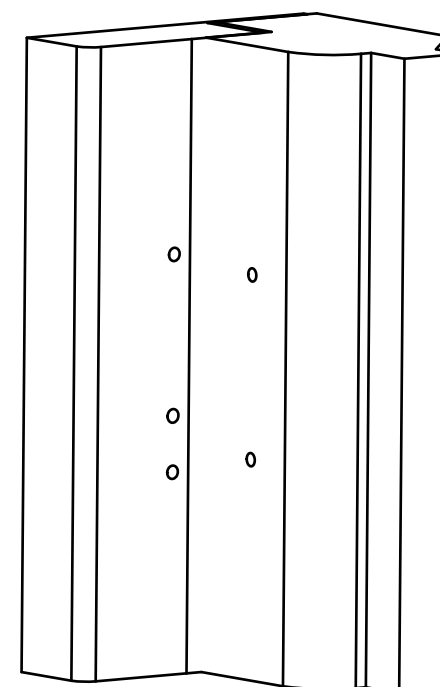


Use:



7

Screw the lock onto the window frame

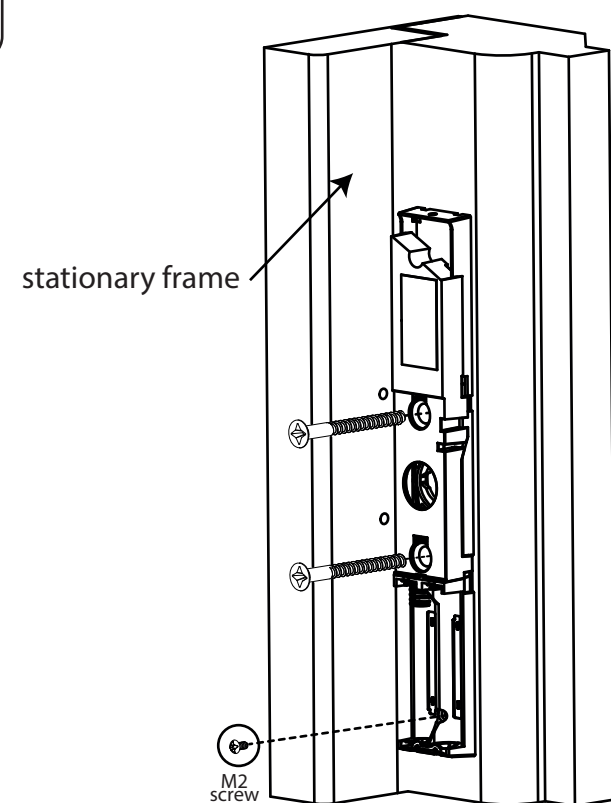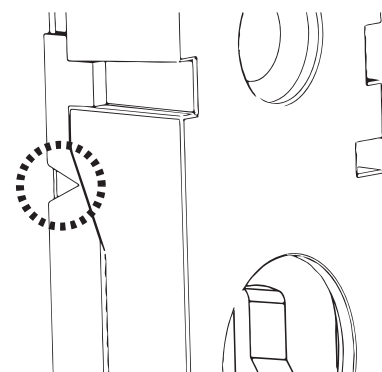**ATTENTION!**


Make sure the small triangle on the lock is facing against the stationary frame

Use:




8

Open window and mount the angle bracket on the stationary window frame

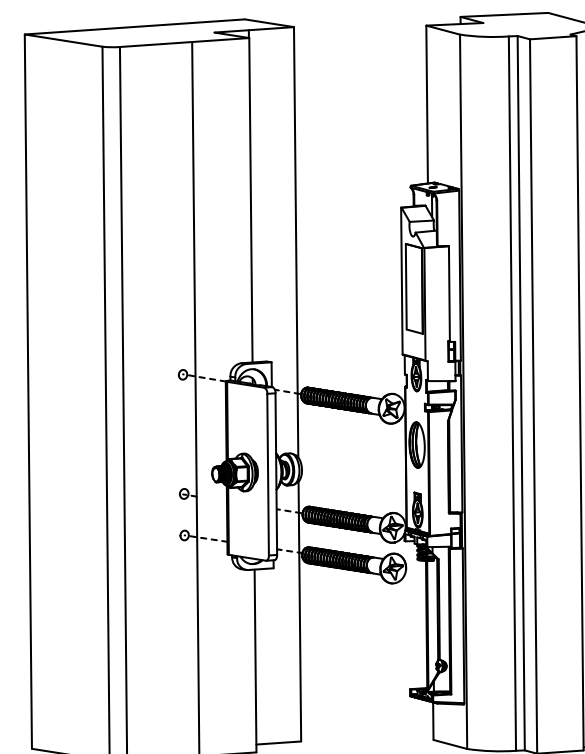


Use:




9

Mount the angle bracket cover and nut cover

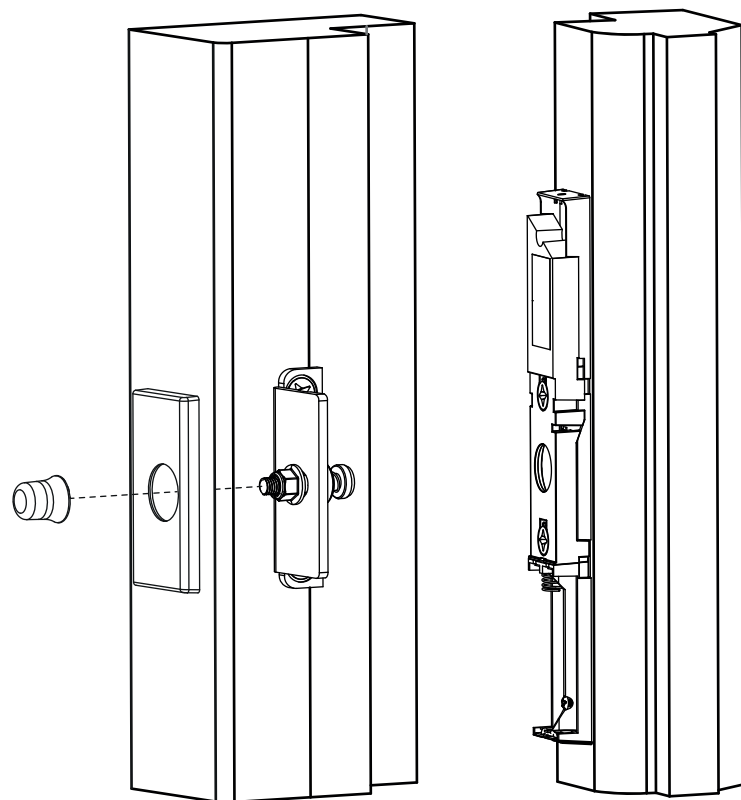


10

Place the batteries

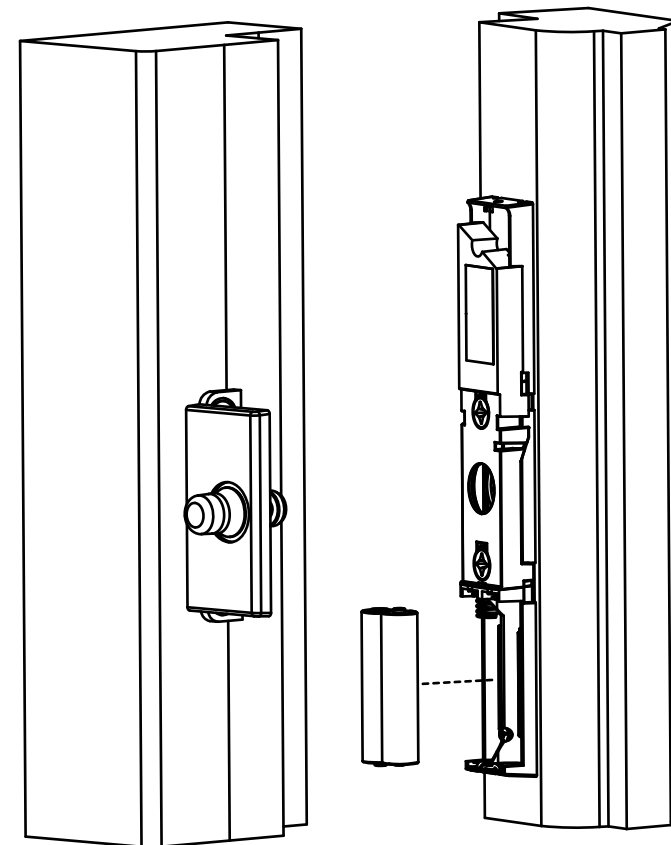

11

Pair the lock with your smartphone

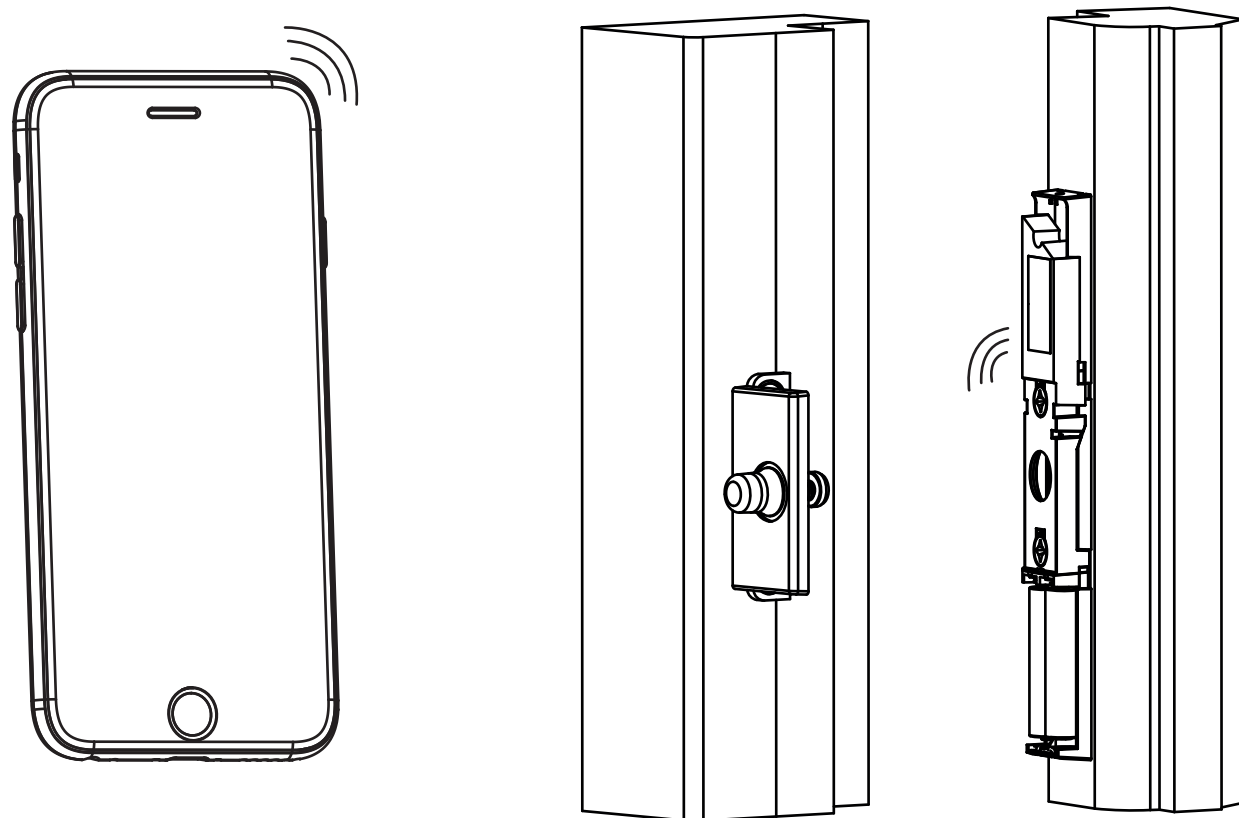

12

Mount cover and close the window

